


THERDEX **WOOD**

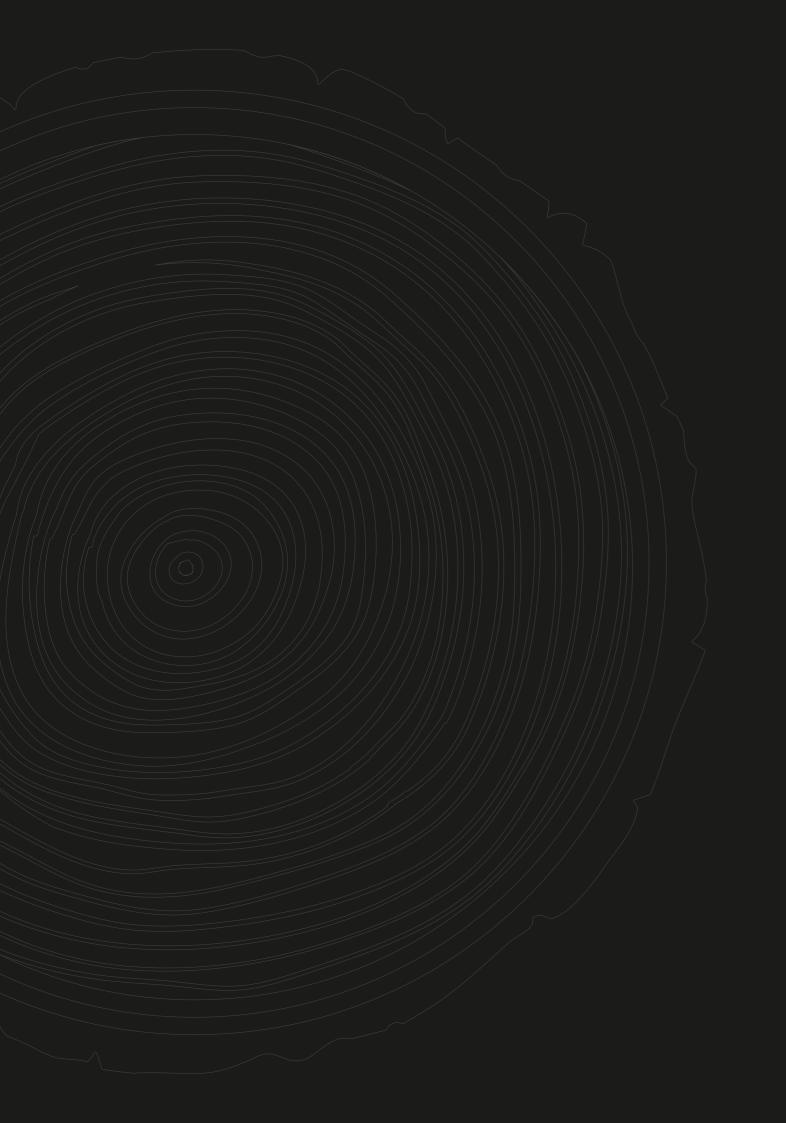

ABOUT **THERDEX**

Therdex is a premium flooring brand for those who appreciate stylish, contemporary design. Natural elegance combined with a warm and inviting appearance makes Therdex the ideal foundation for an interior that truly feels like home. Whether your style is modern, classic, rustic or Scandinavian, Therdex gives every space the right character.

At Therdex, care for people and nature comes first. We place great value on the use of healthy, safe and responsibly sourced materials. With Therdex, you are therefore not only choosing style, but also making an environmentally conscious choice for a sustainable future.



80	ABOUT THERDEX WOOD

10 PRODUCT CONSTRUCTION

13 SUSTAINABLE RESPONSIBILITY

14 THE COLLECTION

22 INSTALLATION INSTRUCTIONS

23 TECHNICAL SPECIFICATIONS



THERDEX **WOOD**

With Therdex Wood veneer parquet, the authentic look of real wood truly comes to life. Each pattern bears the signature of nature, making the floor more than just a surface to walk on. It brings calm and warmth to the interior. The distinctive wood grain creates a natural atmosphere, while every plank exudes luxury and refinement. Each piece is crafted from wood sourced from responsibly managed forests.







REAL HOUT

The top layer of Therdex Wood veneer parquet is made from genuine wood. You do not only see it, you can feel it.



WATERPROOF

Therdex Wood features a waterproof surface that prevents moisture from penetrating the planks and grooves.



SCRATCH RESISTANT

The wooden top layer is finished with an extremely durable coating that makes the floor hard wearing and scratch resistant.



UNDERFLOOR HEATING

Therdex Wood is suitable for installation in combination with underfloor heating.

PRODUCT CONSTRUCTION

01. Wooden top layer



03. Wooden backing layer

01.

Wooden top layer

The top layer is made of genuine wood and finished with 8 layers of lacquer with a super matte appearance. The result is an extremely durable and low maintenance floor surface that is resistant to wear, scratches, moisture and dirt.

02.

HDF core

A strong HDF core made from 100% reclaimed wood. The high density provides excellent stability and outstanding resistance to heavy loads, even under intensive use.

03.

Wooden backing layer

The wooden backing layer keeps the plank dimensionally stable, even with changes in temperature and relative humidity.





THERDEX WOOD A SUSTAINABLE CHOICE

Wood is a valuable material. That is why we use it responsibly and only where it is truly needed, namely for the wooden top layer of our floors. As a result, the production of Therdex Wood requires 25% less wood than the production of solid parquet flooring.

In addition, every tree we use comes from responsibly managed forests. The wood used for our HDF core is also of sustainable origin and is made from 100% reclaimed wood. Furthermore, we use only water based stains, adhesives with a minimal level of volatile organic compounds and lacquers with a low solvent content to finish our floors. This results in optimal indoor air quality and an A+ quality label.

All of our energy is sourced 100% from renewable resources, such as solar and wind power. Our ambition is a completely CO₂ neutral future.

25 %

100 %

less wood required

renewable energy

THE THERDEX WOOD COLLECTION

The Therdex Wood collection consists of six different colours, all crafted in oak. Each design is truly unique, with no two planks alike, just as in nature. The floors feature an almost invisible matte finish, preserving the natural and authentic appearance of the wood.

Dimensions150,60 x 16,60 cmThickness10 mmContent2 m² | 8 pcs.Colours6 colours





W15081

W15082





W15083

W15084





W12041

W70060







In this stylish clothing store, the Wood collection proves that aesthe-tics and functionality can go hand in hand. Durable, strong and suitable for intensive retail traffic.

Floor

W12041









The warm wooden floor gives the lobby an inviting appearance. The result is a space that radiates elegance while remaining suitable for intensive daily use.

Floor W70060



THERDEX WOOD INSTALLATION INSTRUCTIONS

Therdex Wood is very easy to install thanks to the efficient and user friendly Unifit system. Does your home feature underfloor heating or cooling? No problem at all, as both systems are perfectly compatible with Therdex Wood floors.

Scan the QR code for the Therdex Wood installation instructions.



PROPERTIES STANDARD LONG PLANK Type of wood Oak veneer Finish Brushed super matte Titanium High Density Fibreboard Core **Backing layer** Wood Unifit X Click system Installation type Floating Colours **Dimensions** EN 14354 150,60 x 16,60 cm On all sides V-groove Packaging 8 pieces (2 m²) W15081 | W15082 | W15083 | W15084 **Article numbers** W12041 | W70060 approx. 9,5 kg/m² Weight Average thickness 1 cm EN 14354 0,60 mm Top layer thickness EN 14354 23, 33 Use class Fire resistance EN 13501-1 Cfl-s1 CEN / TS 15676 62,25 USRV Slip resistance **Abrasion class** EN 14354 > 6000 rev. **Residual indentation** EN 433 < 0,05 mm Total thickness deviation EN 14354 ≤ 0,5 mm Squareness deviation EN 324-2 ≤ 0,2 mm EN 14354 ≤ 0,2% Width cupping Length cupping EN 14354 3 % approx. 10 dB(A) in combination with Sound reduction Unifloor Bluefloor 0,073 m² k/w Thermal resistance 0,14 W/mK Thermal conductivity Suitable for castor chairs EN 4256 Yes Suitable for underfloor heating Yes Lightfastness EN ISO 105-B02 Grade > 6 EN 13442 Resistance to chemicals Grade 4 AgBB VOC test Approved **REACh Regulation (EC)** Compliant EN14342:2013 Harmonised standard Formaldehyde emission E1 PCP content 5 ppm Indoor Air Comfort Gold pass













23

