




therdex



THERDEX
WOOD

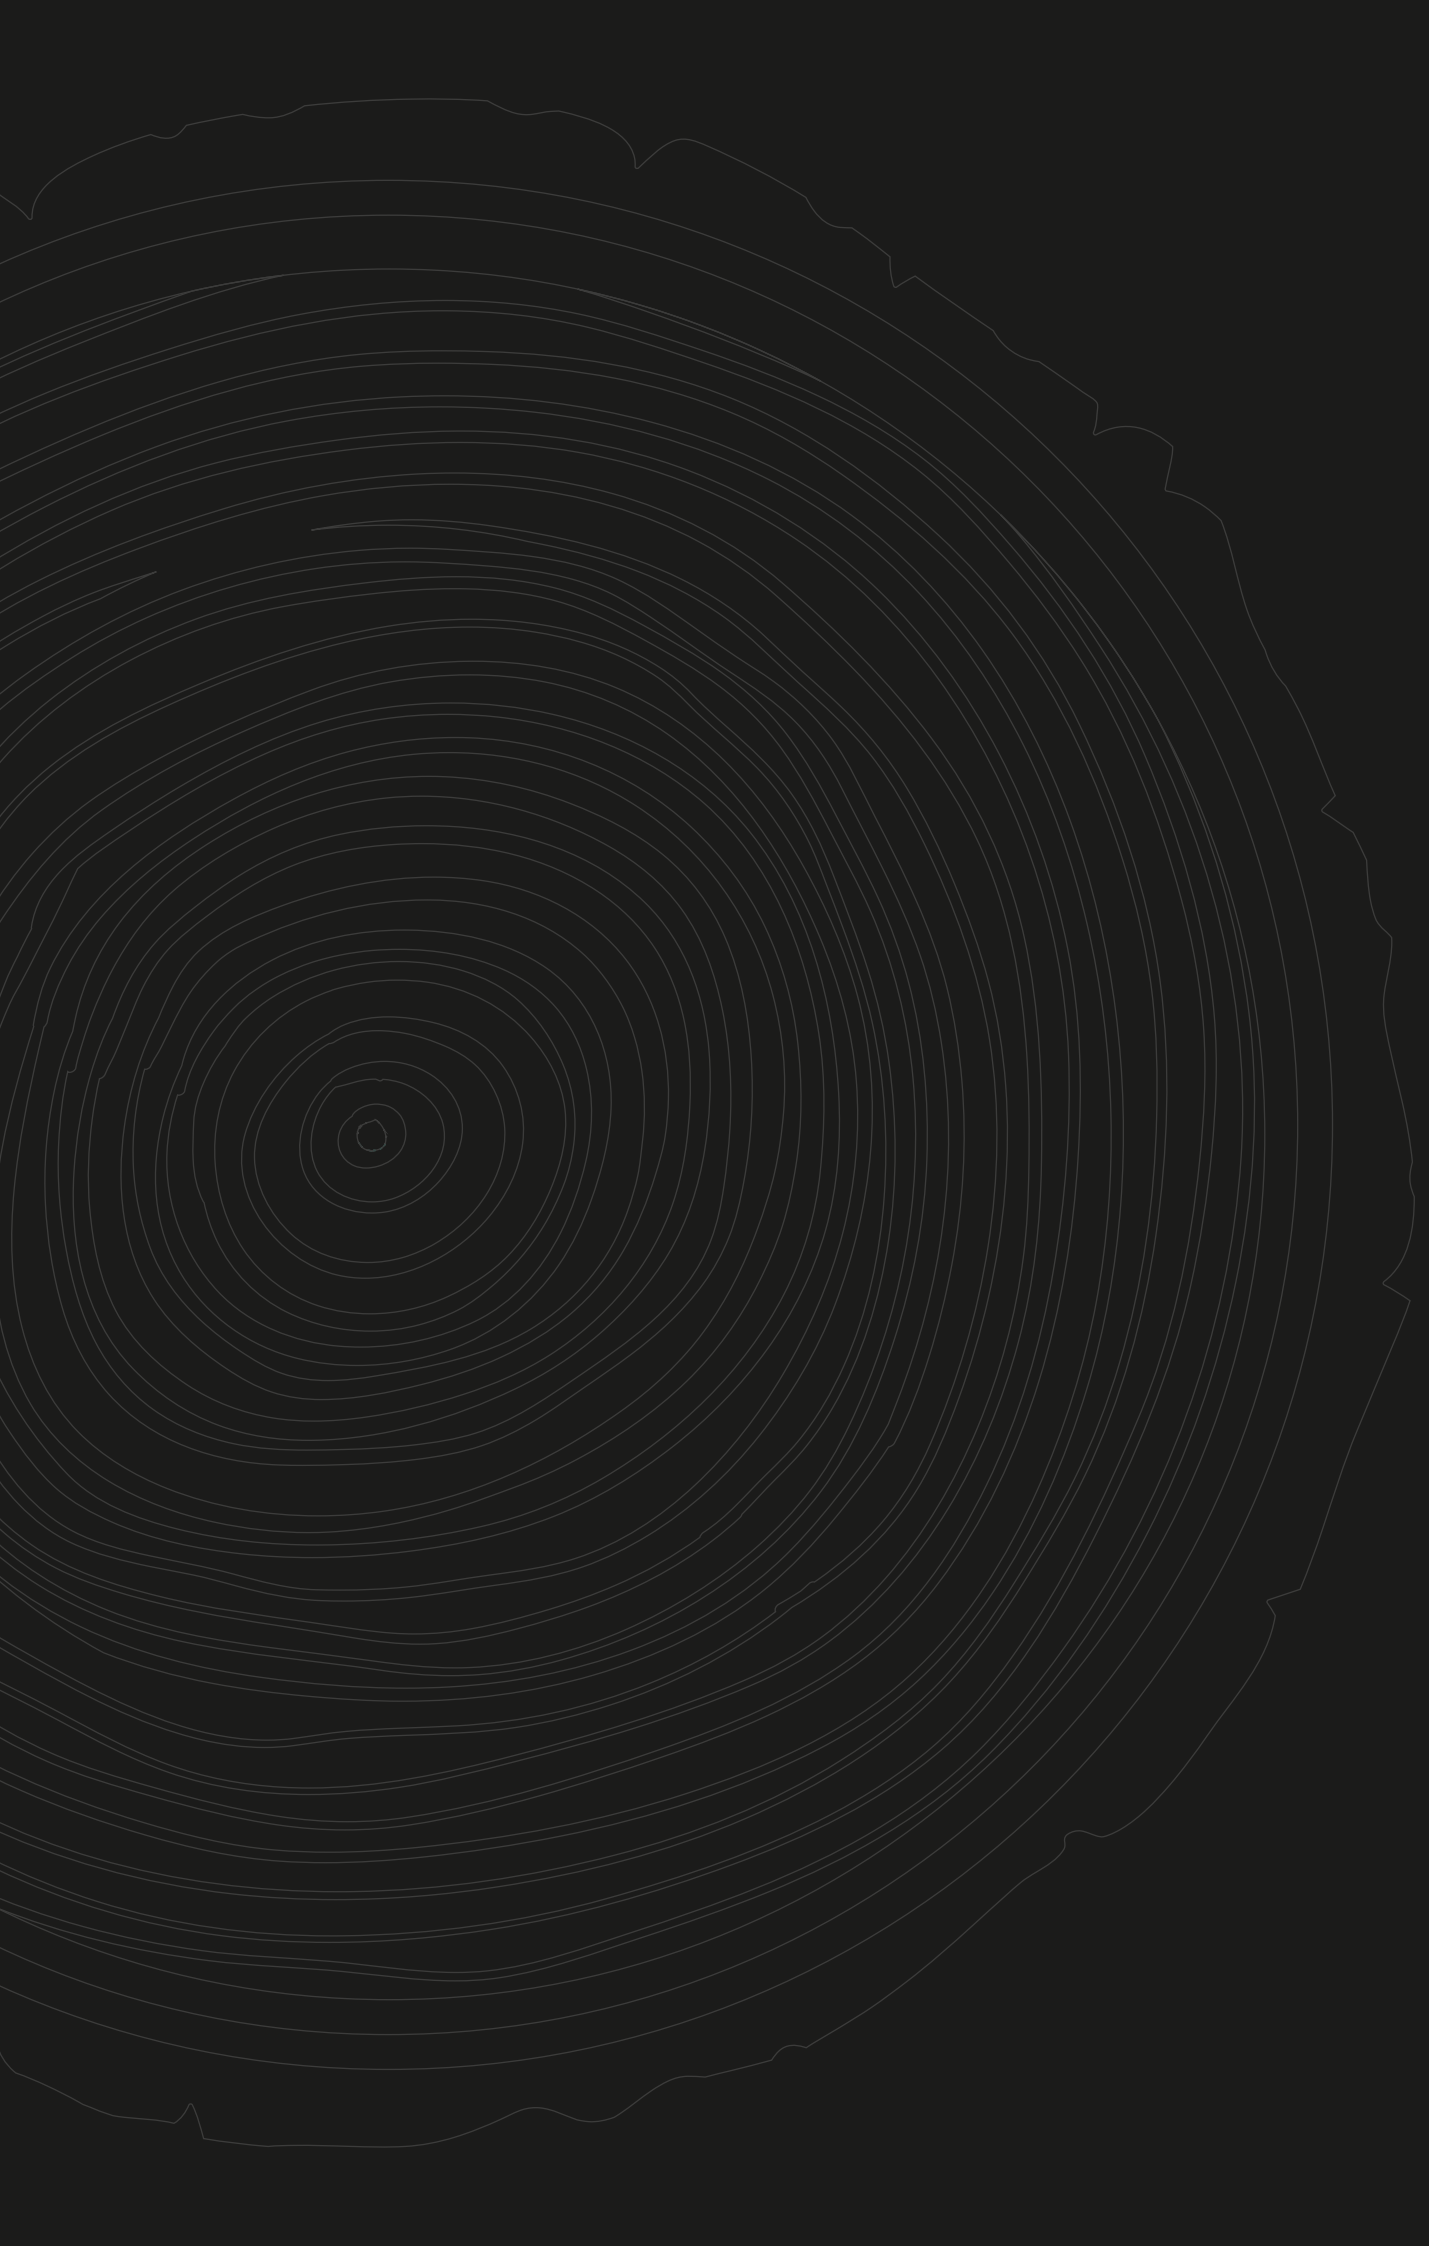

ABOUT **THERDEX**

Therdex is a premium flooring brand for those who appreciate stylish, contemporary design. Natural elegance combined with a warm and inviting appearance makes Therdex the ideal foundation for an interior that truly feels like home. Whether your style is modern, classic, rustic or Scandinavian, Therdex gives every space the right character.

At Therdex, care for people and nature comes first. We place great value on the use of healthy, safe and responsibly sourced materials. With Therdex, you are therefore not only choosing style, but also making an environmentally conscious choice for a sustainable future.

Floor shown on the front cover: W15081



08 ABOUT THERDEX WOOD

10 PRODUCT CONSTRUCTION

13 SUSTAINABLE RESPONSIBILITY

14 THE COLLECTION

22 INSTALLATION INSTRUCTIONS

23 TECHNICAL SPECIFICATIONS



THERDEX WOOD

With Therdex Wood veneer parquet, the authentic look of real wood truly comes to life. Each pattern bears the signature of nature, making the floor more than just a surface to walk on. It brings calm and warmth to the interior. The distinctive wood grain creates a natural atmosphere, while every plank exudes luxury and refinement. Each piece is crafted from wood sourced from responsibly managed forests.



Floor W15084



REAL HOUT

The top layer of Therdex Wood veneer parquet is made from genuine wood. You do not only see it, you can feel it.



WATERPROOF

Therdex Wood features a waterproof surface that prevents moisture from penetrating the planks and grooves.



SCRATCH RESISTANT


The wooden top layer is finished with an extremely durable coating that makes the floor hard wearing and scratch resistant.



UNDERFLOOR HEATING

Therdex Wood is suitable for installation in combination with underfloor heating.

PRODUCT CONSTRUCTION

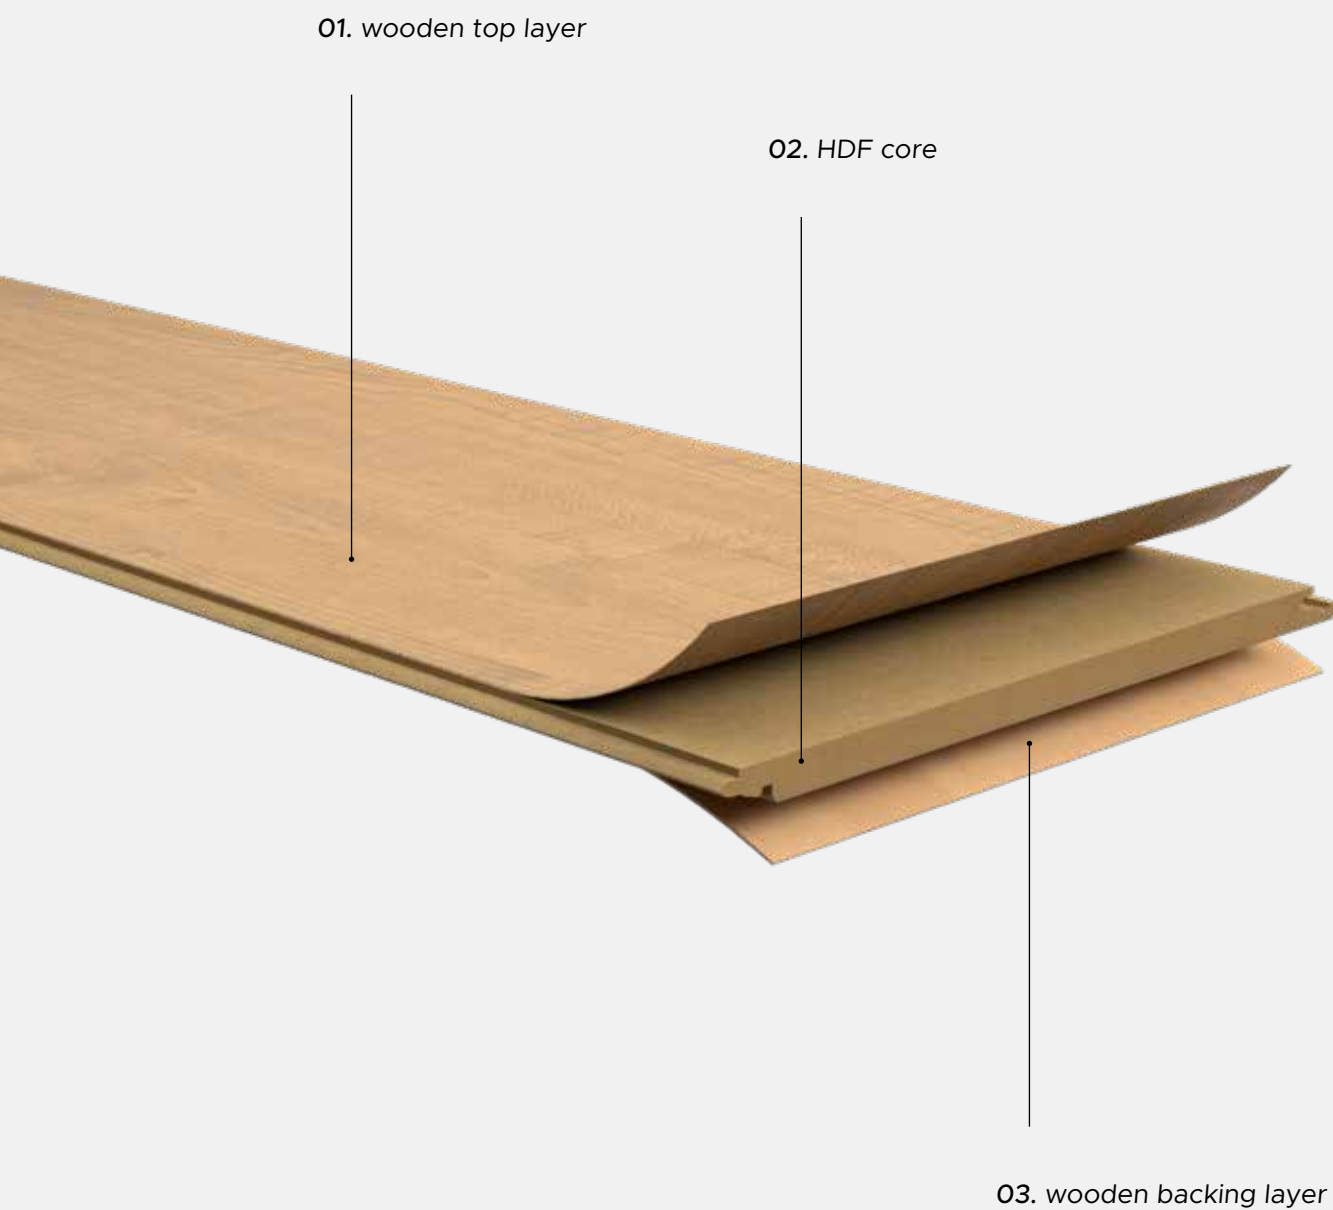

01. wooden top layer

The top layer is made of genuine wood and finished with 8 layers of lacquer with a super matte appearance. The result is an extremely durable and low maintenance floor surface that is resistant to wear, scratches, moisture and dirt.

02. HDF core

A strong HDF core made from 100% reclaimed wood. The high density provides excellent stability and outstanding resistance to heavy loads, even under intensive use.

03. wooden backing layer

The wooden backing layer keeps the plank dimensionally stable, even with changes in temperature and relative humidity.



THERDEX WOOD A SUSTAINABLE CHOICE

Wood is a valuable material. That is why we use it responsibly and only where it is truly needed, namely for the wooden top layer of our floors. As a result, the production of Therdex Wood requires 25% less wood than the production of solid parquet flooring.

In addition, every tree we use comes from responsibly managed forests. The wood used for our HDF core is also of sustainable origin and is made from 100% reclaimed wood. Furthermore, we use only water based stains, adhesives with a minimal level of volatile organic compounds and lacquers with a low solvent content to finish our floors. This results in optimal indoor air quality and an A+ quality label.

All of our energy is sourced 100% from renewable resources, such as solar and wind power. Our ambition is a completely CO₂ neutral future.

25 %

less wood required

100 %

renewable energy



THE THERDEX WOOD COLLECTION

The Therdex Wood collection consists of six different colours, all crafted in oak. Each design is truly unique, with no two planks alike, just as in nature. The floors feature an almost invisible matte finish, preserving the natural and authentic appearance of the wood.

Dimensions	150,60 x 16,60 cm
Thickness	10 mm
Content	2 m ² 8 pcs.
Colours	6 colours



W15081



W15082



W15083



W15084



W12041



W70060



STYLISH CLOTHING STORE



In this stylish clothing store, the Wood collection proves that aesthetics and functionality can go hand in hand. Durable, strong and suitable for intensive retail traffic.

Floor

W12041







The warm wooden floor gives the lobby an inviting appearance. The result is a space that radiates elegance while remaining suitable for intensive daily use.

Floor W70060



**HOTEL
WITH ALLURE**

THERDEX WOOD INSTALLATION INSTRUCTIONS

Therdex Wood is very easy to install thanks to the efficient and user friendly Unifit®-system. Does your home feature underfloor heating or cooling? No problem at all, as both systems are perfectly compatible with Therdex Wood floors.

Scan the QR code for the Therdex Wood installation instructions.



PROPERTIES	STANDARD	LONG PLANK
Type of wood		Oak veneer
Finish		Brushed super matte Titanium
Core		High Density Fibreboard
Backing layer		Wood
Click system		Unifit X
Installation type		Floating
Colours		6
Dimensions	EN 14354	150,60 x 16,60 cm
V-groove		On all sides
Packaging		8 pieces (2 m²)
Article numbers		W15081 W15082 W15083 W15084 W12041 W70060
Weight		approx. 9,5 kg/m²
Average thickness		1 cm
Top layer thickness	EN 14354	0,60 mm
Use class	EN 14354	23, 33
Fire resistance	EN 13501-1	Cfl-s1
Slip resistance	CEN / TS 15676	62,25 USRV
Abrasion class	EN 14354	> 6000 rev.
Residual indentation	EN 433	< 0,05 mm
Total thickness deviation	EN 14354	≤ 0,5 mm
Squareness deviation	EN 324-2	≤ 0,2 mm
Width cupping	EN 14354	≤ 0,2%
Length cupping	EN 14354	3 %
Sound reduction		approx. 10 dB(A) in combination with Unifloor Bluefloor
Thermal resistance		0,073 m² k/w
Thermal conductivity		0,14 W/mK
Suitable for castor chairs	EN 4256	Yes
Suitable for underfloor heating		Yes
Lightfastness	EN ISO 105-B02	Grade > 6
Resistance to chemicals	EN 13442	Grade 4
AgBB VOC test		Approved
REACH Regulation (EC)		Compliant
Harmonised standard		EN14342:2013
Formaldehyde emission		E1
PCP content		5 ppm
Indoor Air Comfort Gold		pass



